


FY WG 3 Axis Wearable Gimbal

Firmware Upgrade Manual


Attention :

- Please insert the batteries before firmware upgrade.
- Please do not operate the function button when in upgrade.
- The firmware upgrade software only supports the Windows operation system provisionally.
- Please operation step by step strictly and make sure click the **OPEN** button to open the com port before the Micro-USB terminal of the USB cable connect to the gimbal.
- If you want to get the current version of the gimbal, please execute from step 3~6.
- Please refer to the following connection diagram, connect the USB cable to the USB connector before upgrading.

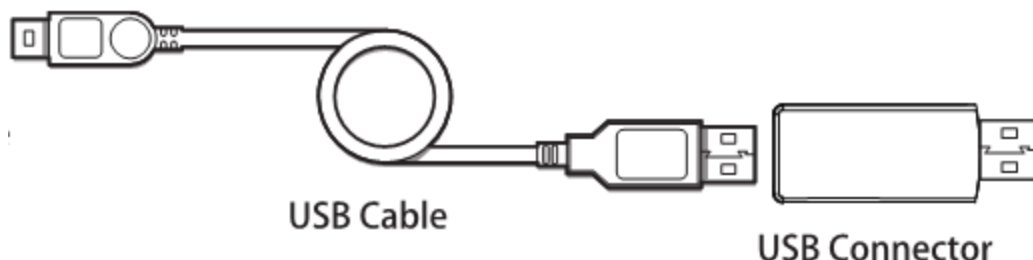

Connection Diagram


1. Download the USB driver from FY-TECH official website and install it. Then download the dedicated firmware upgrade software and the firmware for the gimbal.
2. After successful install the USB driver, please refer to the above connection diagram, connect the USB cable to the USB connector then insert the USB connector to the computer. Confirm the port number in device manager (If the port number is more than COM10 , please modify to the available number which within COM10).

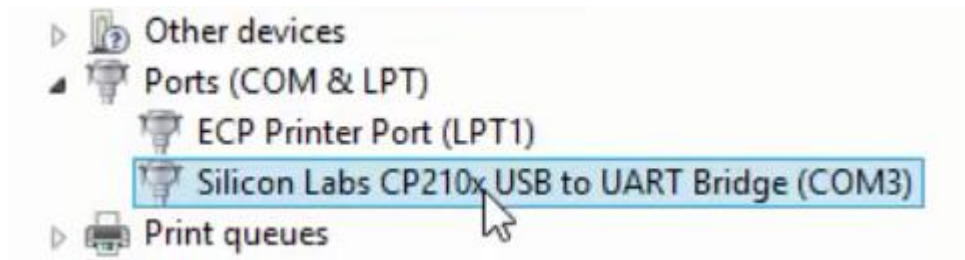


3. Open the software —— “UPDATE FOR 3AXIS”.




4. Software interface is shown in following picture.:

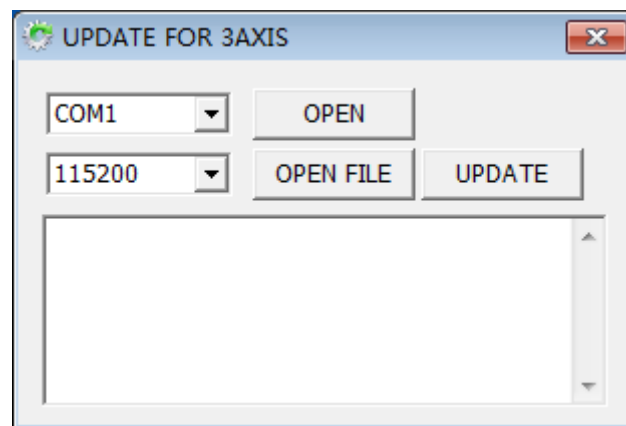


5. Choose the correct port number and the correct baud rate-115200, then click **OPEN** button to open the com port.(The serial port number should be the same as the port number which checked in step 2, for example COM3).

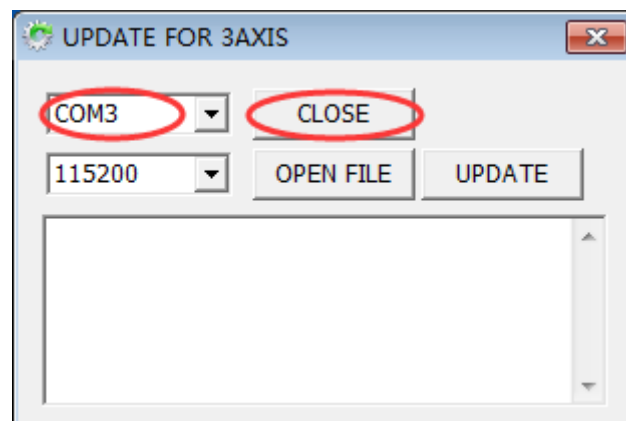


- The Micro-USB terminal connect to the function interface on the gimbal, single click the function button on the gimbal, the LED of it will light on constantly. After connect successful, the software will reminder the connection status and read out the current version (For example "LINK OK! VERSION 1.13"),

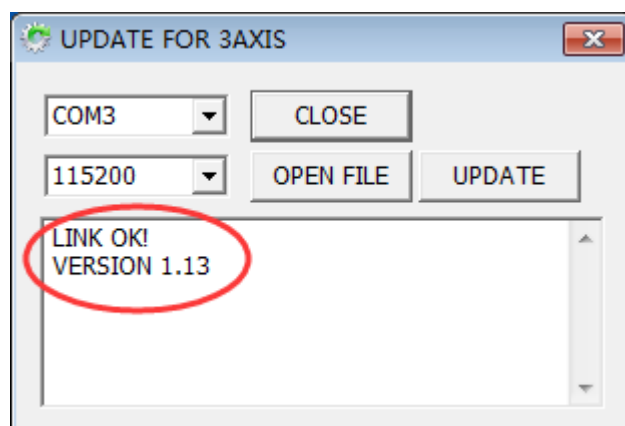

- Click on **OPEN FILE** button and choose the correct firmware for the gimbal.

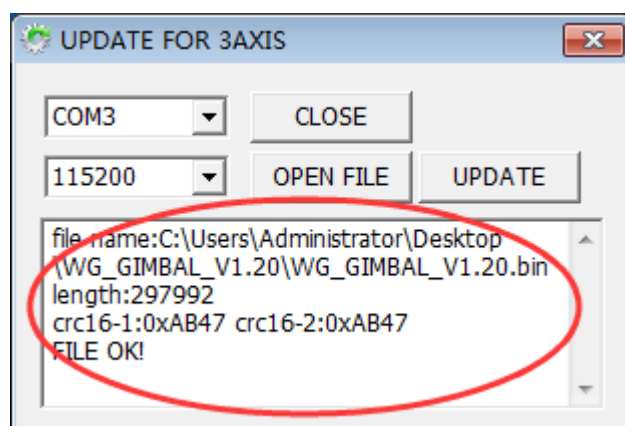

- Click on **UPDATE** button to start upgrading, upgrade process will display on the software.

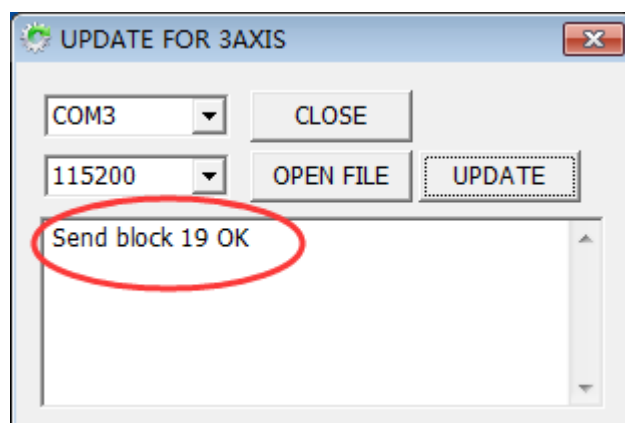

9. Data of firmware being sent to the gimbal completely, please click **Confirm** button to finish the upgrade. Long press the function button on the gimbal for 3 second to power off the gimbal, close the software then remove the USB cable. The gimbal can be used normally



—— END ——

Note: We reserve the right to change this manual at any time! And the newest edition will be shown on our website www.feiyu-tech.com.